

# Map tiles

Patrick Brown

January 5, 2015

1	osm	1
2	osm-no-labels	1
3	osm-de	2
4	osm-transport	2
5	bw-mapnik	2
6	mapquest	3
7	mapquest-sat	3
8	mapquest-labels	3
9	landscape	4
10	opentopomap	4
11	maptoolkit	4
12	waze	5
13	humanitarian	5
14	cartodb	5
15	cartodb-dark	6
16	historical	6
17	stamen-toner	6
18	stamen-watercolor	7

The following are some examples of maps produced with  
`mymap=openmap(x, path="something")`

```
1 plot(openmap(x,path="osm"))
```




```
2 plot(openmap(x,path="osm-no-labels"))
```



```
3 plot(openmap(x,path="osm-de"))
```



```
4 plot(openmap(x,path="osm-transport"))
```

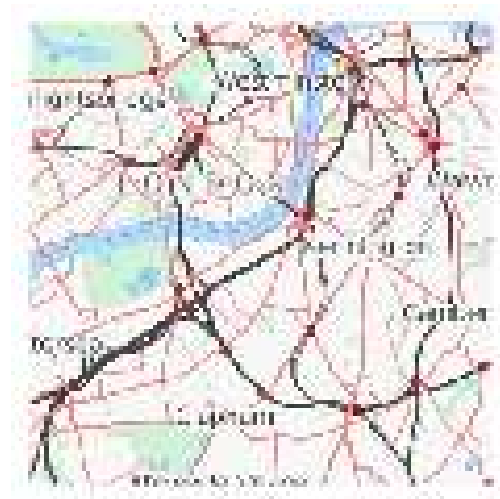

```
5 plot(openmap(x,path="bw-mapnik"))
```



Downloaded by  
red country  
available

```
6 plotRGB(openmap(x,path="mapquest"))
```



```
7 plotRGB(openmap(x,path="mapquest-sat"))
```



```
8 plotRGB(openmap(x,path="mapquest-labels"))
```



```
9 plot(openmap(x,path="landscape"))
```



```
10 plot(openmap(x,path="opentopomap"))
```



```
11 plot(openmap(x,path="maptoolkit"))
```




```
12 plotRGB(openmap(x,path="waze"))
```



```
13 plot(openmap(x,path="humanitarian"))
```



```
14 plot(openmap(x,path="cartodb"))
```

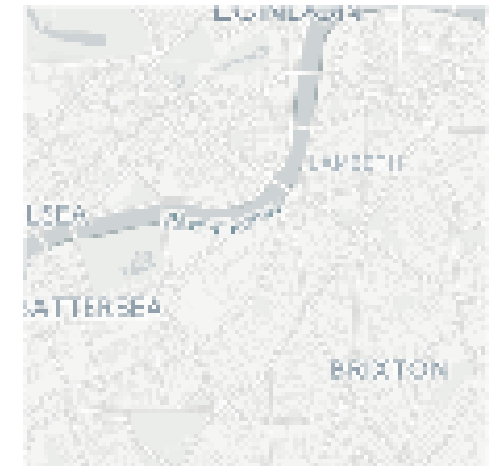


```
15 plot(openmap(x,path="cartodb-dark"))
```



```
16 plot(openmap(x,path="historical"))
```



```
17 plotRGB(openmap(x,path="stamen-toner"))
```

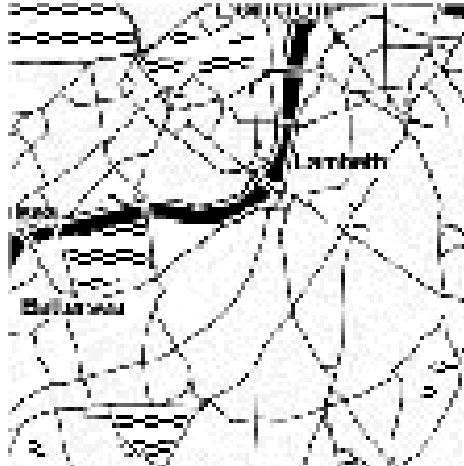

```
18 plotRGB(openmap(x,path="stamen-watercolor"))
```

