

Map tiles

Patrick Brown

November 23, 2013

1	osm	3
2	osm-no-labels	3
3	osm-transport	4
4	bw-mapnik	4
5	mapquest	5
6	mapquest-sat	5
7	landscape	6
8	opentopomap	6
9	maptoolkit	7
10	waze	7
11	humanitarian	8

12 parking-bw	8
13 osm-locale-de	9
14 bw-noicons	9
15 osm-labels-en	10
16 osm-labels-fr	10
17 osm-labels-de	11
18 osm-labels-it	11
19 osm-labels-es	12
20 osm-labels-ru	12
21 stamen-toner	13
22 stamen-watercolor	13

The following are some examples of maps produced with `mymap=openmap(x, path="something")`


1 `plot(openmap(x,path="osm"))`



2 `plot(openmap(x,path="osm-no-labels"))`



3 `plot(openmap(x,path="osm-transport"))`

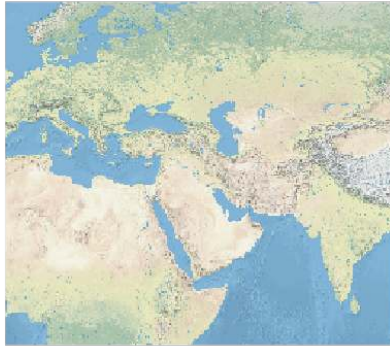

4 `plot(openmap(x,path="bw-mapnik"))`




5 `plotRGB(openmap(x,path="mapquest"))`



6 `plotRGB(openmap(x,path="mapquest-sat"))`



7 `plot(openmap(x,path="landscape"))`



8 `plot(openmap(x,path="opentopomap"))`


opentopomap is
not currently
available




9 `plot(openmap(x,path="maptoolkit"))`



10 `plot(openmap(x,path="waze"))`

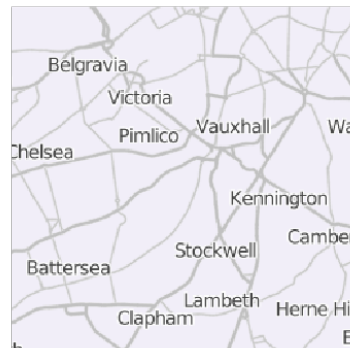



```
11 plot(openmap(x,path="humanitarian"))
```



```
12 plot(openmap(x,path="parking-bw"))
```




13 `plot(openmap(x,path="osm-locale-de"))`

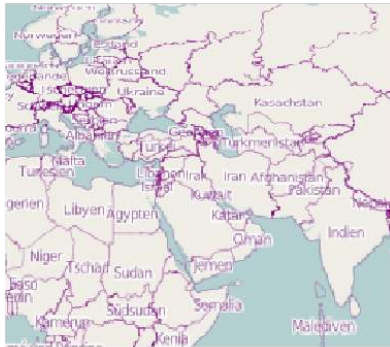

14 `plot(openmap(x,path="bw-noicons"))`




15 `plot(openmap(x,path="osm-labels-en"))`

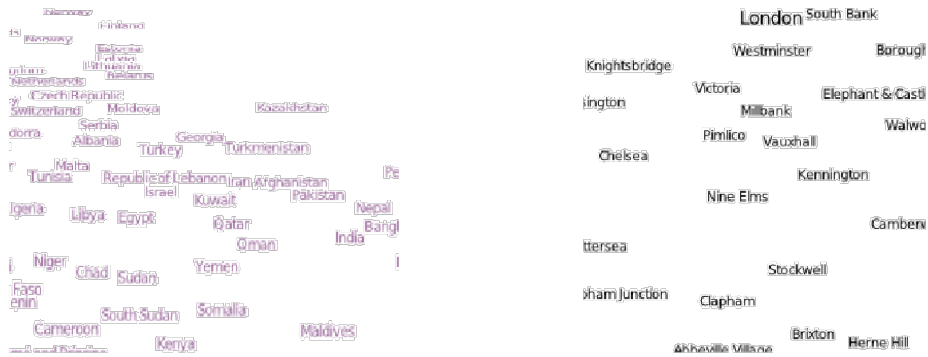

16 `plot(openmap(x,path="osm-labels-fr"))`



17 `plot(openmap(x,path="osm-labels-de"))`

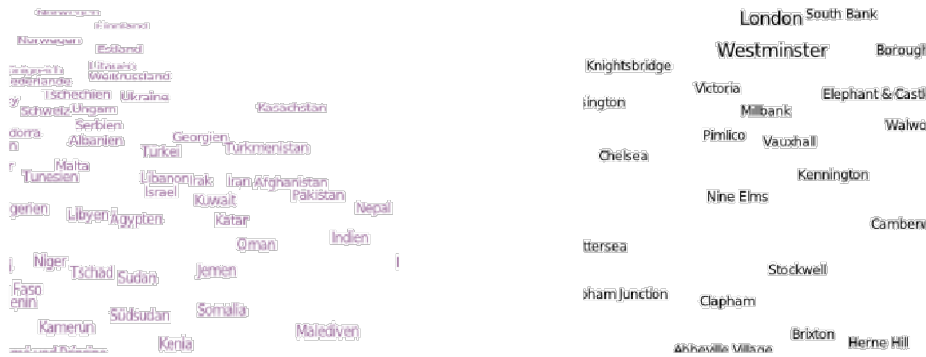

18 `plot(openmap(x,path="osm-labels-it"))`




19 `plot(openmap(x,path="osm-labels-es"))`



20 `plot(openmap(x,path="osm-labels-ru"))`



```
21 plot(openmap(x,path="stamen-toner"))
```



```
22 plotRGB(openmap(x,path="stamen-watercolor"))
```

